


# Instant Productivity at Your Fingertips

## Océ PlotWave 500 printing system

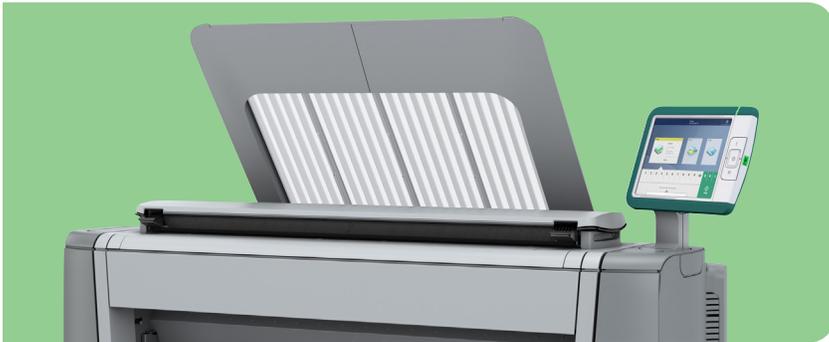

### Cloud integrated, advanced large format technical document management

Take control of document costs and project workflows with the instant productivity of the Océ PlotWave® 500 large format printer, copier, and scanner. Printing and collating documents inefficiently can be costly and eat up the valuable time of knowledge workers. With this black & white large format workhorse, you have the power you need to print faster, share faster, and finish projects faster.

#### GET A COMPACT SINGLE-FOOTPRINT WORKHORSE

The Océ PlotWave 500 printing system is built for fast production — at an impressive ten D-size/A1 drawings per minute and up to four rolls of media. That's up to 600 prints per hour! It starts printing from sleep mode in less than 17 seconds thanks to Océ Radiant Fusing technology, compared to a slow start-up of four minutes for some conventional printers. That can easily save you an hour or more just in printing delays. And while printing, there is no need to wait to scan. You can print and scan concurrently.

Just like the Océ PlotWave 340/360 printing system, walk-up users interact with this printer like a smartphone/tablet thanks to the 10.4" color LCD touchscreen

interface with multi-touch. That means CAD professionals are already familiar with the Océ ClearConnect user interface from the onset. And true to its name, Océ ClearConnect makes the right connections to get the job done. Print on the way to your next meeting or from a job site — to keep work moving even when you can't get to the printer.

Many of today's architectural, engineering, and construction firms across the globe have been built using Océ technical document systems. CAD professionals in a variety of technical industries can react faster and work more efficiently thanks to our productive, innovative, and easy-to-use printing systems, making the Océ PlotWave 500 printer an effective solution for today's technical document workflow challenges.

#### ENJOY WORKFLOW WITHOUT THE WORK

Being able to submit files to your large format printer from anywhere can give you a big advantage when time is tight and deadlines are looming. The Océ ClearConnect software suite gives you more flexible ways to submit files to the printer. Print from your desktop via Océ Publisher Select™ software to manage complex document sets. With Océ Publisher Mobile, print from your smartphone or tablet when you are rushing to a meeting. Knowing you can print when you need to, can take some of the stress out of your work day.





### OCÉ PLOTWAVE 500 PRINTER HIGHLIGHTS

Incredibly fast print out
Virtually silent* in Standby and Sleep (*under 25 dB)
Accelerated first print out from standby mode (D-size/A1)
Average print from sleep mode (D-size/A1)
Effortless roll changing
High capacity document delivery
Effortless job submission
Océ ClearConnect multi-touch user interface (standard)
High print quality
Future proof connectivity

### SYSTEM CONFIGURATIONS

2 Rolls printing system (standard)
Productive scanning system (optional)
Folding systems (optional)
Stacking system (standard)
Stacking system (optional)
Media capacity upgrade (optional)
Workflow software (standard)
Workflow software (optional)
Hardware optional
Starter kit included

### GENERAL

User interface
Imaging technology
Fusing technology
Toner/ type
Speed (print and copy):
First copy output time from standby mode (D-size/A1)
Resolution
Size main engine (W x D x H)
Weight main engine

### MEDIA HANDLING

Media capacity
Paper cutting
Maximum paper capacity
Media sizes
Media weight (min. / max.)
Roll width (min. / max.)
Minimum printed length
Maximum printed length

### OCÉ PLOTWAVE 500 PRINTER HIGHLIGHTS

Print speed of 10 ppm (D-size/A1)
1-click printing from USB, 1-click printing from Océ Smart Inbox or last send job (Océ SmartAccess)
Instant start-up with Océ Radiant Fusing technology
Océ Radiant Fusing technology eliminates noise
16 seconds
30 seconds
Simple and easy, motor fed media loading, one media cutter per drawer, automatic media width detection
Double capacity (100 E-size/A0) Top Delivery Tray supporting longer runs and higher productivity
Green button design: what you see is what you print resulting in first time right result
Consistent look and feel from every angle of your workflow, standard including Océ Smart Inbox, Océ SmartAccess, and Océ Live Preview
Océ Pico printing and Océ Image Logic technology enables the best print quality possible
Cloud connected and Smartdevice enabled system

### OCÉ PLOTWAVE 500 PRINTER HIGHLIGHTS

Productive large format B&W printer with Océ ClearConnect multi-touch user interface
Océ Scanner Express II with Océ Image Logic technology
Océ 4312 FullFold, Océ 2400 FanFold
Integrated Top Delivery Tray, 100 sheets capacity (100 E-size/A0)
Océ Delivery Tray (up to 150 sheets)
Additional 2 rolls media drawer to increase media capacity
Océ Large Format Printer Driver 2.0 for Microsoft® Windows®, Océ PostScript® 3™ driver, Océ Mobile WebTools for iOS®, Android® and BlackBerry®, Océ Publisher Mobile for iOS and Android, Océ Publisher Express, Océ Publisher Select
Océ View Station, Océ Client Tools™ software, Adobe® PostScript 3/PDF file interpreter, Océ Repro Desk® software, Océ Account Center
Media drawer with standard 2 rolls, Scanner Express II, Océ 2400 FanFold, Océ 4312 FullFold, high capacity Océ Delivery Tray
1 bottle toner 450 gr., 1 bottle developer 1750 gr., 1 roll 36" media bond (20 lb.)

### OCÉ PLOTWAVE 500 PRINTER HIGHLIGHTS

Océ ClearConnect with multi-touch, LiveView and Preview on the Océ ClearConnect user panel, 1-click printing by Océ SmartAccess
Electrophotography (LED) with Organic photoconductor (OPC), Océ Radiant Fusing Technology with instant warm up, clean toner refill system, virtually no ozone emission
Océ Radiant Fusing technology
Océ black toner: 450 grams per bottle
10 D-size/A1 ppm, 5 E-size/A0 ppm
19 seconds
600 x 1200 dpi
Compact design: 60.1" x 31.6" x 58.9" (1527 x 803 x 1495 mm) (including top delivery tray)
585 lbs. (265 kg.)

### OCÉ PLOTWAVE 500 PRINTER HIGHLIGHTS

2 or 4 rolls (i.e. 1 or 2 media drawers)
Cutters included in drawers for fast and easy media switching
2 roll: 3,900 sq. ft. (365 m <sup>2</sup> ) 4 roll: 7,800 sq. ft. (730 m <sup>2</sup> )
ARCH: B, C, D, E, E1, 30", 21", 15" ANSI: B, C, D, E ISO: A3, A2, A1, A0, B2, B1, B2_700, B1_700
16 – 28 lb. ( 60 – 110 g/m <sup>2</sup> )
11" – 36" (279 – 914 mm)
11" (279 mm)
577' (176 meters)



**MEDIA HANDLING CONTINUED**

Output delivery	Top (default): Top Delivery Tray (100 E-size/A0) Rear (optional): rear output to Océ Delivery Tray, Océ 4312 FullFold, or Océ 2400 FanFold
Media Type (www.csa.canon.com)	Paper, Engineering Bond, Vellum, Recycled Bond, Tinted Bond, Film: Polyester 3.5 mil

**USER INTERFACE**

Description	Océ ClearConnect multi-touch user interface
Size (W x D x H)	11.8" x 8.7" x 1.6" (300 x 220 x 40 mm) Touch screen: 10.4" (diag.) Color LCD (264 mm diag.)
Resolution	800 x 600 pixels
Number of colors	16.2 Million
Technology	Projective capacitive touch
Operation	Three hard buttons: [Wake-up], [Stop, interrupt, abort], [Home] Multi-touch functions: tap, double tap, pinch, swipe, flick, and spread
Interface design	IF design award: distinctive user interface and intuitive navigation and clearly defined levels of operation
Features	View optimization: Tilt (-4 to +45 degrees) and turn (-45 to +180 degrees) Status light (red, orange, green) USB 2.0 interface with indication light

**MEDIA HANDLING CONTINUED**

Output delivery	Top (default): Top Delivery Tray (100 E-size/A0) Rear (optional): rear output to Océ Delivery Tray, Océ 4312 FullFold, or Océ 2400 FanFold
Media Type (www.csa.canon.com)	Paper, Engineering Bond, Vellum, Recycled Bond, Tinted Bond, Film: Polyester 3.5 mil

**USER INTERFACE**

Description	Océ ClearConnect multi-touch user interface
Size (W x D x H)	11.8" x 8.7" x 1.6" (300 x 220 x 40 mm) Touch screen: 10.4" (diag.) Color LCD (264 mm diag.)
Resolution	800 x 600 pixels
Number of colors	16.2 Million
Technology	Projective capacitive touch
Operation	Three hard buttons: [Wake-up], [Stop, interrupt, abort], [Home] Multi-touch functions: tap, double tap, pinch, swipe, flick, and spread
Interface design	IF design award: distinctive user interface and intuitive navigation and clearly defined levels of operation
Features	View optimization: Tilt (-4 to +45 degrees) and turn (-45 to +180 degrees) Status light (red, orange, green) USB 2.0 interface with indication light

**CONTROLLER**

Description	Océ PowerM® controller with Windows 7 Embedded Standard (WES7), 32 bits
Processor	Dual-Core G540 @ 2.50GHz
Memory	4 GB DDR3 (standard)
Video	Intel HD Graphics, 1GHz
Hard disk	500 GB, 7200 rpm
Interface	Ethernet 100 Mbits/s, 1 Gbit/s TCP/IP: DHCP, IPv4, IPv6, https Discovery: APIPA, WSD
Page description language	TIFF, JPEG, HPGL, HPGL2, DWF, C4, Calcomp 906/907/951, CALS, NIRS, NIFF, PS/PDF (optional)
Printing protocol:	LPR, FTP, WebDav, WSD print
Back Channel Protocol:	SNMP printer MIB, Océ Wave interface 1.2, WSD
Security	E-shredding, IPsec, HTTPS, extended security protection for administrator, audit logging. User authentication on local UI for FTP, SMB and WebDav. Configure HTTPS Certificates.
Cloud support	Unlimited user and/or Administrator authenticated cloud support via WebDav and/or third party provider: e.g. Microsoft SharePoint®, Dropbox®, Box.com, box.net, Google® Drive®, Microsoft SkyDrive®, Amazon®, CloudSafe®, MyDisk®.
Transformations	Scaling: Scaling (scale-to-fit page, reduce when image too large to avoid clipping or to custom factor, scale page size to standard size), Rotation, Shift (automatic or user defined), Adding/removing trailing/leading edge, Mirror, Black intensity in poster mode, Print optimization (standard, lines/text, poster). Color Highlight and Dark Original.

**CONTROLLER**


Description	Océ PowerM® controller with Windows 7 Embedded Standard (WES7), 32 bits
Processor	Dual-Core G540 @ 2.50GHz
Memory	4 GB DDR3 (standard)
Video	Intel HD Graphics, 1GHz
Hard disk	500 GB, 7200 rpm
Interface	Ethernet 100 Mbits/s, 1 Gbit/s TCP/IP: DHCP, IPv4, IPv6, https Discovery: APIPA, WSD
Page description language	TIFF, JPEG, HPGL, HPGL2, DWF, C4, Calcomp 906/907/951, CALS, NIRS, NIFF, PS/PDF (optional)
Printing protocol:	LPR, FTP, WebDav, WSD print
Back Channel Protocol:	SNMP printer MIB, Océ Wave interface 1.2, WSD
Security	E-shredding, IPsec, HTTPS, extended security protection for administrator, audit logging. User authentication on local UI for FTP, SMB and WebDav. Configure HTTPS Certificates.
Cloud support	Unlimited user and/or Administrator authenticated cloud support via WebDav and/or third party provider: e.g. Microsoft SharePoint®, Dropbox®, Box.com, box.net, Google® Drive®, Microsoft SkyDrive®, Amazon®, CloudSafe®, MyDisk®.
Transformations	Scaling: Scaling (scale-to-fit page, reduce when image too large to avoid clipping or to custom factor, scale page size to standard size), Rotation, Shift (automatic or user defined), Adding/removing trailing/leading edge, Mirror, Black intensity in poster mode, Print optimization (standard, lines/text, poster). Color Highlight and Dark Original.

**SCANNER**

Description	Contact Image Sensor (CIS) Color scanner with Océ Image Logic technology
Scan resolution	600 x 600 dpi
Scan speed	Up to 47.9 ft./min (14.6 m/min) Black & White scanning Up to 31.8 ft./min (9.7 m/min) Copying Up to 15.7 ft./min (4.8 m/min) Color scanning
Scan formats	TIFF, PDF, PDF/A, JPEG, CALS, multi-page PDF, multi-page PDF/A and multi-page TIFF
Scan destination	Local USB flash drive, FTP, SMB, Controller, mobile device via Océ Mobile WebTools, WebDav Cloud
Scan naming	Preset naming with auto numbering for productive scanning or file name on the Océ ClearConnect user panel keyboard
Original width (min. / max.)	8.2" – 36" (208 – 914 mm)
Original length (min. / max.)	8.2" – 52.5' (208 mm – 16 m)
Original thickness	Maximum 0.03" (0.8 mm) non-rigid documents
Zoom	1:1, Scale to media size, Scale to standard format, Custom: 10 – 1000%
Preset modes	Lines & text, Lines & text draft, Folded lines & text, Photo, Colored, Dark original, Blueprint, Color Highlight
Size scanner (W x D x H)	43" x 12" x 5.5" (1,097 x 308 x 140 mm)
Weight scanner	46 lbs. (21 kg.)

**SCANNER**

Description	Contact Image Sensor (CIS) Color scanner with Océ Image Logic technology
Scan resolution	600 x 600 dpi
Scan speed	Up to 47.9 ft./min (14.6 m/min) Black & White scanning Up to 31.8 ft./min (9.7 m/min) Copying Up to 15.7 ft./min (4.8 m/min) Color scanning
Scan formats	TIFF, PDF, PDF/A, JPEG, CALS, multi-page PDF, multi-page PDF/A and multi-page TIFF
Scan destination	Local USB flash drive, FTP, SMB, Controller, mobile device via Océ Mobile WebTools, WebDav Cloud
Scan naming	Preset naming with auto numbering for productive scanning or file name on the Océ ClearConnect user panel keyboard
Original width (min. / max.)	8.2" – 36" (208 – 914 mm)
Original length (min. / max.)	8.2" – 52.5' (208 mm – 16 m)
Original thickness	Maximum 0.03" (0.8 mm) non-rigid documents
Zoom	1:1, Scale to media size, Scale to standard format, Custom: 10 – 1000%
Preset modes	Lines & text, Lines & text draft, Folded lines & text, Photo, Colored, Dark original, Blueprint, Color Highlight
Size scanner (W x D x H)	43" x 12" x 5.5" (1,097 x 308 x 140 mm)
Weight scanner	46 lbs. (21 kg.)

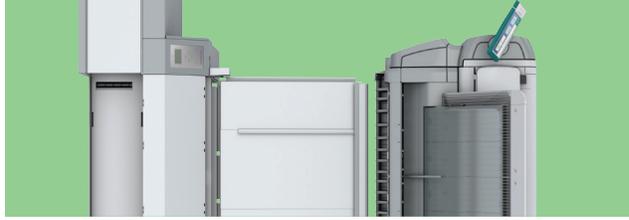

## Creating global leadership in printing

Canon and Océ join forces to create the global leader in the printing industry. For our customers this combines Canon and Océ technology with the support of the Océ direct sales and service organizations. Look to the new Canon-Océ combination for:

- Enterprise printing in the office and corporate printroom
- Large format printing of technical documentation, signage and display graphics
- Production printing for marketing service bureaus and graphic arts
- Business services for document process outsourcing



ENVIRONMENTAL	
Sound power level	Standby and Sleep modes: less than 25 dB Print mode: less than 55 dB
Ozone concentration	<0.001 mg/m <sup>3</sup> (0.05% of permitted limit value)
Heat emission	Ready: 72 W, Active: 1.6 kW
Power requirements	90 – 240 V, 50/60 Hz
Power consumption	Sleep Mode: 1 W Ready Mode: 88 W Active Mode: 1.5 kW
Safety/EMC marks & environmental labels	CE, TUV GS, CETECOM, C-UL-US, Energy Star 2.0, FEMP
Recyclables	Printer: made of steel or highly recyclable plastics: up to 95% of the engine can either be upcycled or recycled. Remaining 5% are non toxic waste. Toner: bottles made of highly recyclable HDPE (High Density Polyethylene)
OCÉ WORKFLOW SOFTWARE	
Job submission	Create, retrieve and/or send jobs from drivers (Océ Large Format Printer Driver 2.0 for Microsoft Windows, Océ PostScript 3 driver), external locations (SMB, FTP, LPR, WebDav), Mobile devices via Océ Express WebTools and Océ Publisher Mobile, USB flash drive, Cloud services. 1-click printing from USB, 1-click printing of last send jobs by Print SmartAccess on Océ ClearConnect user panel. Smart Inbox on Océ ClearConnect user panel enables job preview, swipe between your jobs for print selection and preview. Pan to view the image in detail (zoom). Multiple files and originals are supported. Print multiple times, and sort by page or set. Media saving automatically rotates originals to optimize media usage. Full support of Adobe PostScript 3.
Queue Management	Spool memory provides a queuing system for print or copy jobs. This allows multiple users to send print and copy jobs at the same time. Customize priority settings for copy and print jobs in the queue. Queue overview gives access to job names, owners and status including required media. Jobs can be paused, deleted and placed on top of the queue.
Print management	View counter history at preferred time periods, per job or total overview. View, create, edit and delete stamp templates.
Scan to file	Océ Scanner Express II offers full hybrid performance with its scan-to-file functionality. Send files, via SMB, FTP, LPR, WebDAV, to various locations such as local drives, personal Smart Inboxes, or the cloud application of your choice. Scan to USB or use Océ Mobile WebTools and Océ Publisher Mobile to scan to mobile device. Custom scan file naming to any location. Checkplot functionality. Océ ClearConnect supports Live Preview of the scanning process on the user panel. Full support of Adobe PostScript 3.

The Océ logo, Océ, Océ PlotWave, Océ Image Logic, Océ Color Image Logic, Océ Repro Desk and Océ PowerM are registered trademarks of Océ-Technologies B.V. Océ Publisher Select and Océ Client Tools are trademarks of Océ-Technologies B.V. CANON is a registered trademark of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. All other referenced product names and marks are trademarks of their respective owners and are hereby acknowledged.  
©2014 Canon Solutions America, Inc. All rights reserved.